



**[ IE25H-PRV ]**

**1.5" Pressure Restricting Angle Valve with hydrolator Female NPT Inlet x Female NPT Outlet.**




300 lb (2070 KPa) pressure tested approved valve. Heavy Duty 1-1/2" (38 mm) pressure restricting angle hose and hydrolator valve. Automatically drains and vents, safeguarding against hose deterioration. O-ring packing and red cast handle. Forgeline Bonnet and Seat Assembly. Water pressure is controlled by adjustable flow restriction. If full flow is required, the restriction may be overridden. Furnished with field setting chart. UL/ULC listed and FM Approved.

**FINISH:** Cast Brass



**Dimensions:**

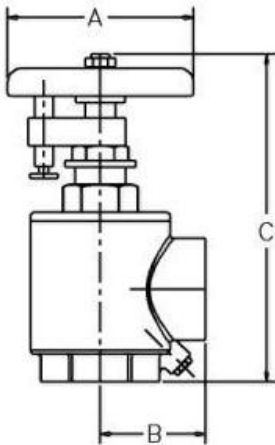

A = 4" (100mm)  
B = 2 1/4" (56mm)  
C = 8" (OPEN) (200mm)  
C = 7" (CLOSED) (175mm)  
WEIGHT: 5.05 lbs (2.30Kg)  
WORKING PRESSURE: 300 lb (2070 Kpa)