

SCLD

An efficient and secure exit and emergency light combo that offers a traditional look and superior performance. Save money buying this 2-in-1 product.

Project _____
Catalog Number _____
Type _____
Date _____

- Combines two emergency fixtures into one unit
- LED technology consumes less than 5 watts electricity
- Push-to-test button with LED charging indicator
- Works for single and double face applications

HOUSING Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

ILLUMINATION Long lasting, efficient ultra-bright white LED lamp heads. 1 watt (8 LEDs x 0.125 watt) per head. High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution. Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing. Long-life, energy efficient Red or Green LED Exit sign illumination.

ELECTRICAL Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

TRANSFER/CHARGING CIRCUITRY Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY 9.6V long life, maintenance-free, rechargeable NiCd battery.

MOUNTING EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

OPTIONS **HL:** 12-LED heads provide increased center-to-center spacing (1.5W per head). **SD:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. **RC:** Remote capacity option available.. **NH:** No lamp head attach to the unit enabling it to be used as remote capable exit sign.

LISTINGS Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. UL listed for damp locations, 32°F (0°C) – 104°F (40°C). Certified to CEC under Title 20 Regulations.

WARRANTY 5 year warranty on all electronics and housing. Battery pro-rated for five years.




SCLD Series Ordering Configuration

SERIES	FACES	LETTER COLOR	HOUSING COLOR	OPTIONS	ACCESSORIES
SCLD	2 = Universal single/double face	R = Red G = Green	W = White B = Black	RC = Remote Capable HL = High Lumen SD = Self Diagnostics NH = No Lamp Heads	PS1 = Vandal Shield SW2 = Wire Guard

Available in B units only. ²Available in AC units only.

Dimensions

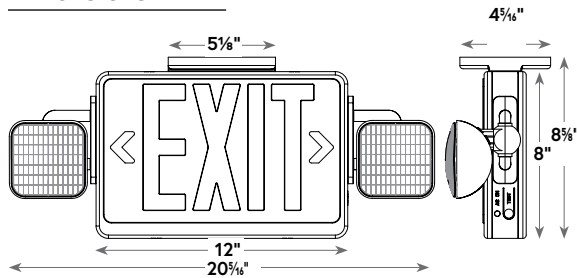

Electrical Data

Model	Input Wattage (W)		Input Amps (A)	
	120V	277V	120V	277V
SCLD2R	3.7	3.8	0.040	0.020
SCLD2G	3.0	3.2	0.030	0.014
SCLD2R RC	3.4	3.6	0.033	0.015
SCLD2R/G RC SD	5.2	5.7	0.046	0.022

Accessories



SW2



PS1

Remote Lamp Compatibility

Model	Battery	Remote Capacity	Compatible Remote Head Family		
			DLHRC		
			R	C	MV
			3.6V	9.6V	ALL
SCLD2R RC	9.66V	3W-4W		X	X